



The World's Sixth Sense®

THERMAL VISION FOR PROFESSIONAL MARINERS





THERMAL IMAGING BASICS

Thermal imaging works night and day, in total darkness or bright sunlight, through smoke, dust, and even light fog to keep your passengers and crew safe from hazards and threats.


See natural and man-made hazards, such as floating debris, rocks, ice, land, bridge abutments, and other vessels.

Thermal night vision helps you find a person in the water faster than any other night vision technology.

FLIR cameras and thermal video are incredibly intuitive and easy to understand. Quite simply, what you see is what you get.

Daylight cameras, image intensified night vision (I²), and the human eye all create images from reflected visible light. Traditional night vision scopes and goggles all take in small amounts of visible light and magnify it. However, traditional imagers have the same limitations as the human eye: if there isn't enough light available, they don't work well. Plus, during daylight and twilight hours, they aren't useful either because there is too much light for them to work effectively.


FLIR thermal cameras work both day and night, regardless of light. They're totally immune to the effects of darkness, glare, or even direct sunlight.

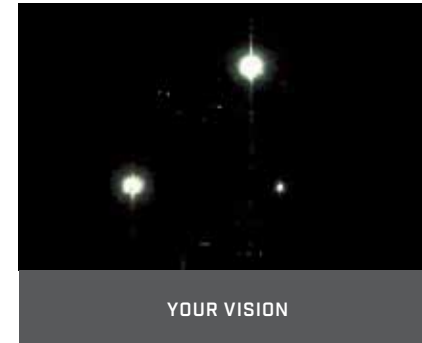

YOUR VISION



TRADITIONAL GEN3 IMAGE INTENSIFIED NIGHT VISION

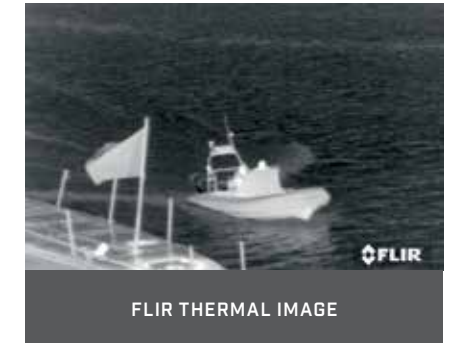

FLIR THERMAL IMAGE

RESOLUTION, DETAIL, AND RANGE

FLIR offers a range of thermal imaging cameras with varying levels of image resolution. Much like a digital camera, FLIR cameras with higher pixel counts offer more detail, clarity, and range than models with less resolution. FLIR also offers models with advanced optics for extreme long-range performance.



LOWER RESOLUTION IMAGERS PROVIDE GOOD, BASIC TARGET DETECTION



HIGHER RESOLUTION THERMAL IMAGERS OFFER INCREASED LEVELS OF DETAIL AND LONG-RANGE PERFORMANCE

FLIR FOR COMMERCIAL MARINERS

THE SEA CAN BE A DANGEROUS PLACE, ESPECIALLY AT NIGHT

But professional mariners can't call it a day when the weather turns foul. FLIR thermal imagers offer an "early warning system" against common hazards so mariners can sail with confidence, whatever the conditions. FLIR maritime thermal imagers display the invisible heat energy from a myriad of potential hazards, including floating debris, shipping lane traffic, vessels riding at anchor, and small boats. FLIR imagers can also reveal man-made structures, such as buoys, bridge abutments, docks and piers. They can even spot icebergs and surfacing whales.



FLIR FOR FIRST RESPONDERS

THERMAL VISION: THE 24/7 TACTICAL ADVANTAGE

First responders gain critical tactical awareness using FLIR thermal cameras, day or night, in good weather and bad. With FLIR thermal vision you can observe suspicious activity in total darkness, quickly locate people in the water, and avoid obstacles while going full throttle in response to emergencies. From border patrols to port security, search and rescue to drug interdiction, FLIR thermal imaging cameras can greatly enhance critical mission success.



RECOMMENDED COMMERCIAL SYSTEMS:



RECOMMENDED FIRST RESPONDER SYSTEMS:











M500 ULTRA HIGH PERFORMANCE MULTI-SENSOR CAMERA SYSTEM

PREMIUM LONG RANGE THERMAL VISION

The FLIR M500 cooled thermal night vision camera is our most technologically advanced M-Series camera ever. Designed around a cryogenically cooled Mid Wave Infrared (MWIR) thermal sensor, it excels at both short and ultra-long range target detection and identification. The M500 includes a cooled midwave, high resolution 640 x 512 pixel thermal camera with a 1X to 14X continuous optical zoom and a field of view between 28° and 2°. It also comes with an integrated HD color visible camera system and a spot-beam LED target illumination system. Built on a ruggedized marine gimbal system, the M500 is a pan and tilt camera with standard gyro stabilization, video tracking and radar integration.

NEW FOR 2017



-  High intensity LED spot-beam can highlight targets of interest, while preserving the night vision of on-deck personnel
-  HD Color lowlight camera with 30x optical zoom
-  Gyro stabilized to ensure steady viewing in heavy sea conditions
-  Cooled MWIR Thermal imager with 640 x 512 resolution and 14xOptical Zoom
-  Rugged, waterproof gimbal enclosure with automatic window heaters for ice management.
-  360° pan and +/-90° tilt capability
-  Video tracking: follow objects in the camera's view
-  Firefighting mode optimizes the color palette to see hot spots and take temperature measurements on scene

SUPERIOR SHORT- AND LONG-RANGE VISION

- Cooled thermal core technology and continuous optical zoom enables early detection of vessels or navigation aids in the distance
- Active gyro stabilization delivers a steady image in rough seas, simplifying target identification and enhancing situational awareness
- Superior FLIR thermal technology allows captain to quickly recognize nearby buoys and detect key landmarks, such as islands or docks

ENHANCED TARGET AWARENESS

- Video target tracking automatically keeps the M500 locked onto a moving or stationary target
- Radar integration allows the M500 to automatically track selected radar targets
- Firefighting mode provides enhanced awareness for first responders with a target temperature meter and isotherm displays

ENHANCED CLARITY:

- High performance thermal and visible camera payloads for detection and visible identification
- A 14x optical thermal zoom and a field of view between 2° and 28° enables long range target detection
- Easily identify long range targets with a HD color visible camera with 30x zoom and 64° to 2.3° HFOV
- The M500's integrated spotlight illuminates nearby targets with powerful LED beam

For technical specifications, turn to page 35



THE COOLED THERMAL CORE OF THE M500 PROVIDES HIGH CONTRAST THERMAL IMAGES.



NEGOTIATE TIGHT WATERWAYS IN TOTAL DARKNESS WITH CONFIDENCE.



IDENTIFY LONG RANGE TARGET BOTH DAY AND NIGHT WITH THE M500 HIGH PERFORMANCE VISIBLE ZOOM CAMERA.

DETECTION RANGES




www.flir.com

Specifications subject to change without prior notice. Images for reference purposes only

RANGE COMPARISON CHART

The following chart compares the man-overboard and small vessel detection distances for the FLIR range of thermal cameras.

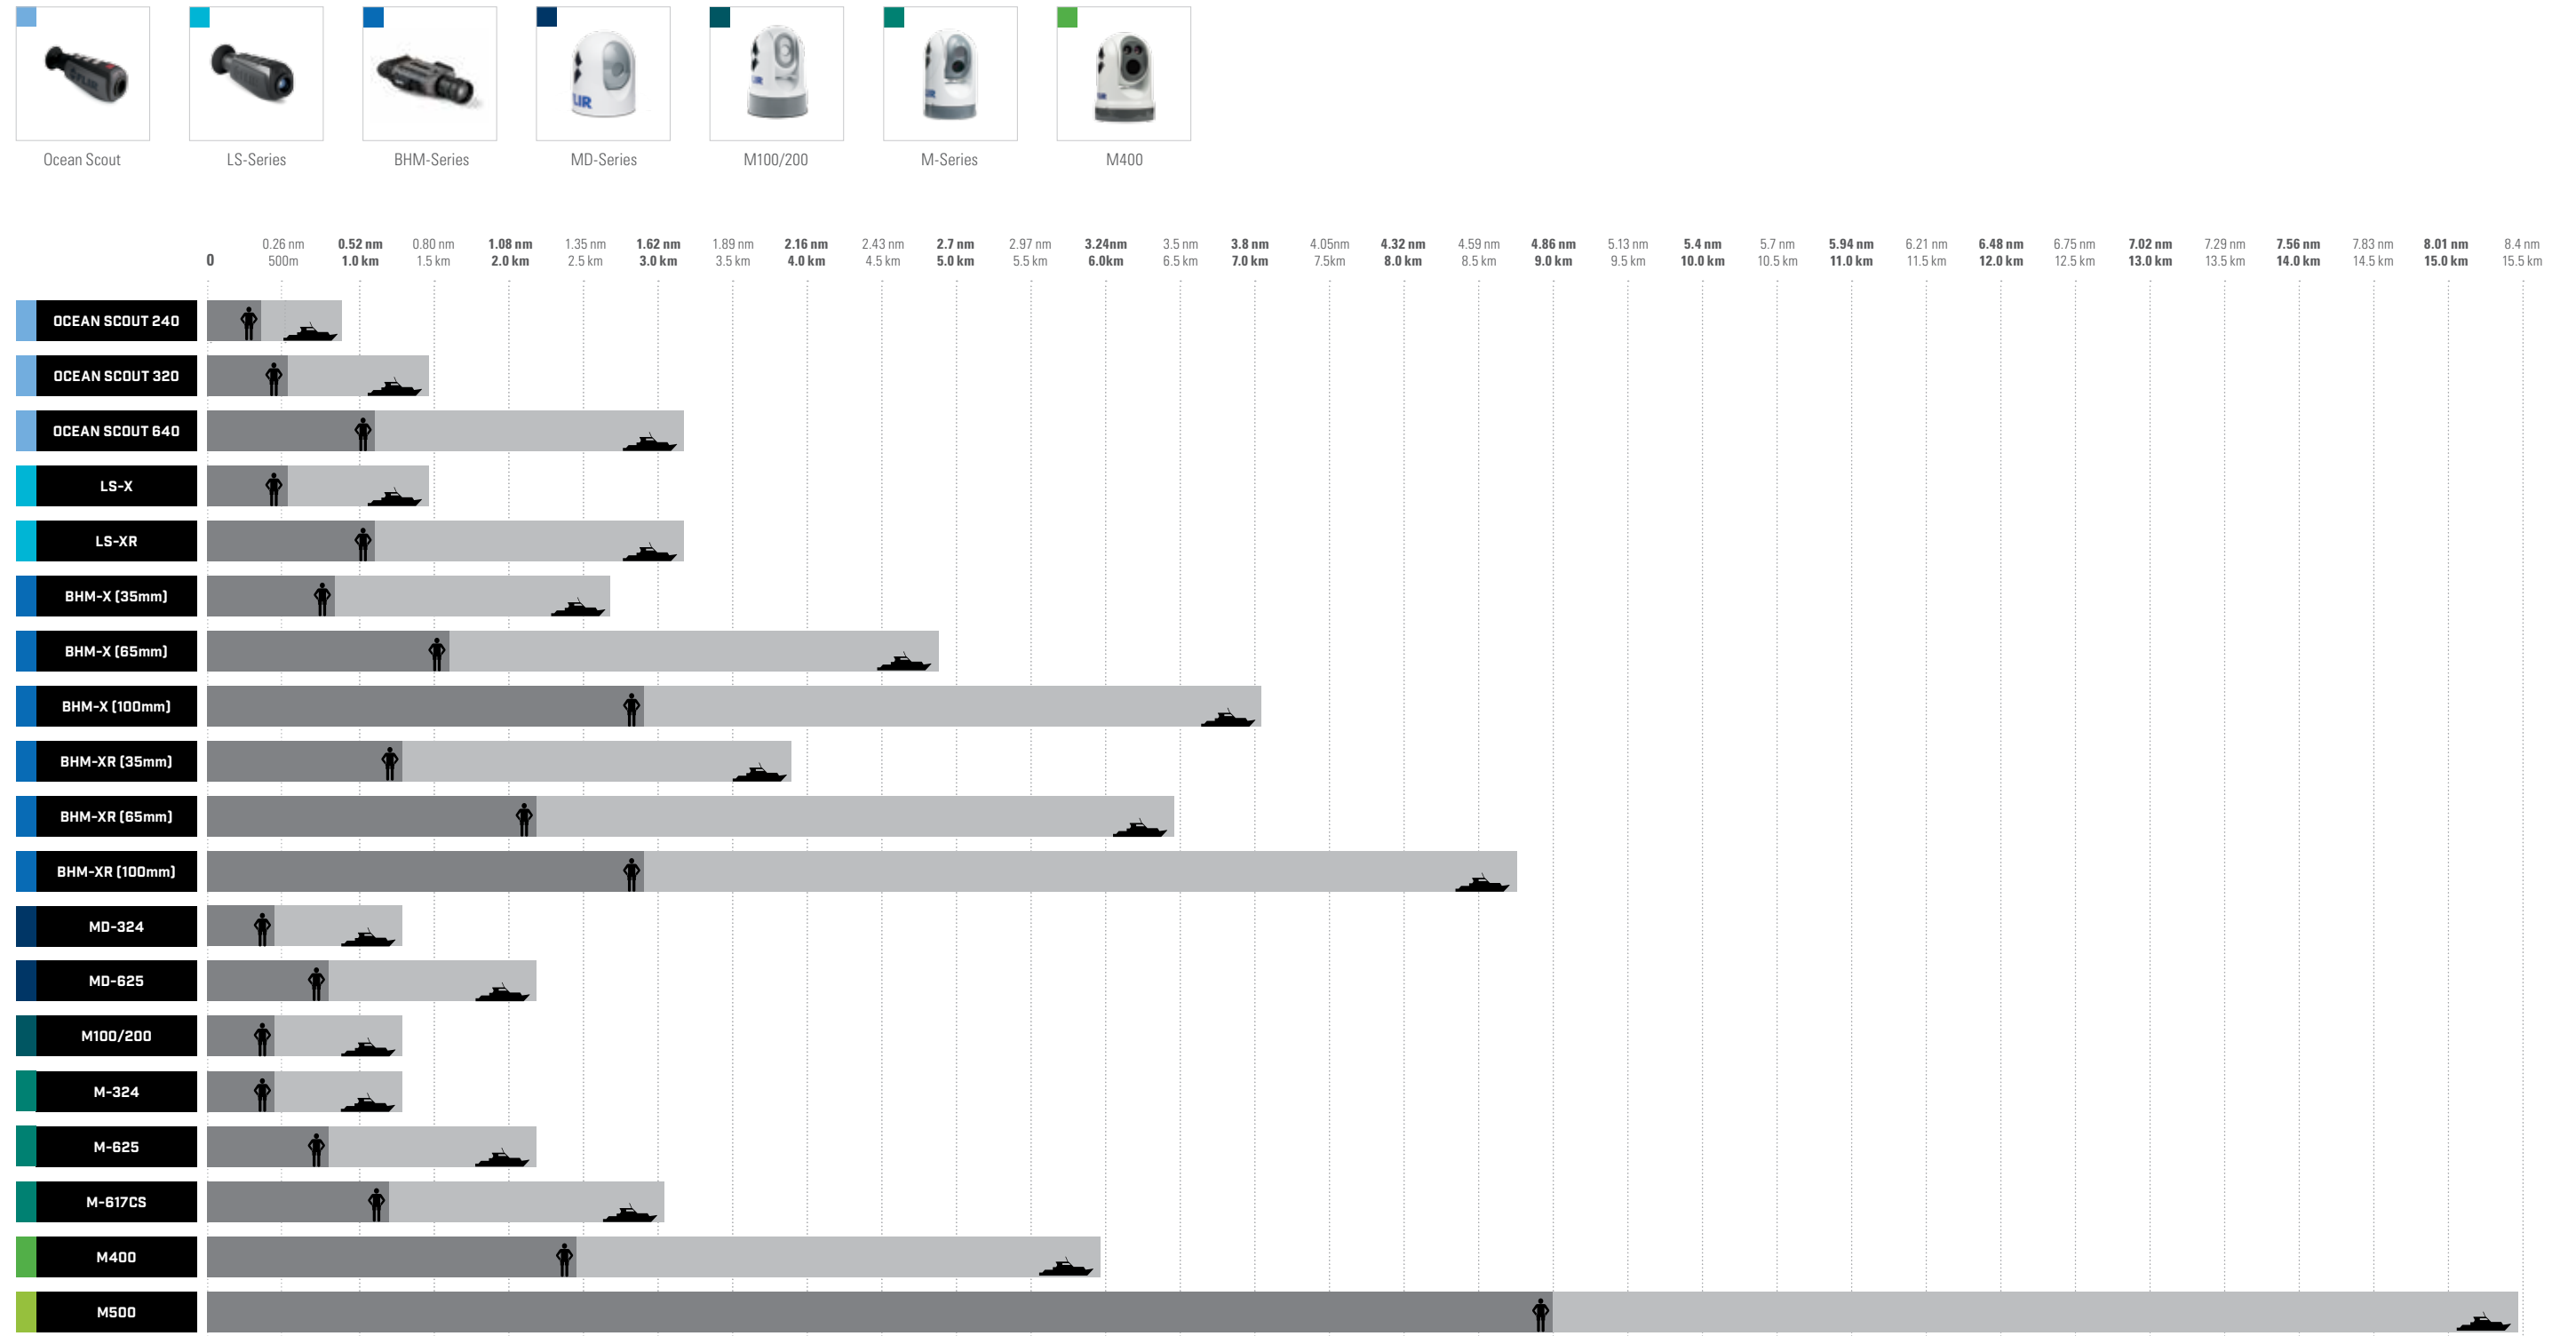

Specifications subject to change without prior notice. Images for reference purposes only.

Specifications subject to change without prior notice. Images for reference purposes only.

IMAGE RESOLUTION AND SAMPLE IMAGES

M100/M200 SERIES MARINE THERMAL VISION CAMERAS

Get the clear vision you need to navigate around obstacles, avoid collisions, and find people in the water at night. M232 provides full pan/tilt for horizon-to-horizon vision, while the M132 allows for tilt position to compensate for changes in deck angle.



M132	M232
320 x 240 pxl	320 x 240 pxl



M-SERIES: NEXT GENERATION MULTI-SENSOR THERMAL NIGHT VISION

The M-Series creates thermal images with tremendous detail for such an affordable night vision system. You will see more—and see farther—even in the dead of night. An optional lowlight TV camera provides enhanced navigational abilities during twilight hours. And M-Series cameras also feature detailed, color on-screen symbology for instant access to system status, position, and configuration. Resolution (320 x 240 or 640 x 480 pixels) is model dependent.



M-324	M-625
320 x 240 pxl	640 x 480 pxl



Images for illustrative purposes only

M400 & M400XR: ADVANCED MULTI-SENSOR THERMAL NIGHT VISION

The FLIR M400's advanced 640x480 sensor delivers crisp thermal video images in total darkness and low-light conditions. An integrated HD color visible camera and narrow-beam LED spotlight augment target identification for added safety.



M400	M400-XR
640 x 480 pxl	640 x 480 pxl



M500: HIGH-PERFORMANCE MARINE MULTI-SENSOR CAMERA SYSTEM

The FLIR M500's advanced 640x512 sensor delivers crisp thermal video images in total darkness and low-light conditions. An integrated HD color visible camera augments target identification for added safety.




M500
640 x 512 pxl



Images for illustrative purposes only

M-SERIES NEXT GENERATION SPECIFICATIONS


	M-324S	M-324CS	M-625S	M-625CS	M-617CS
MAIN THERMAL CAMERA					
Detector Type	336 x 256 VOx Microbolometer	336 x 256 VOx Microbolometer	640 x 512 VOx Microbolometer	640 x 512 VOx Microbolometer	640 x 512 VOx Microbolometer
Video Refresh Rate	< 9 Hz or 30 Hz (NTSC)	< 9 Hz or 30 Hz (NTSC)	< 9 Hz or 30 Hz (NTSC)	< 9 Hz or 30 Hz (NTSC)	< 9 Hz or 30 Hz (NTSC)
Field of View	24° x 18°	24° x 18°	25° x 20°	25° x 20°	17° x 14°
Focal Length	13 mm	13 mm	25 mm	25 mm	35 mm
Focus	Fixed 14 ft (4.4 m) to infinity	Fixed 14 ft (4.4 m) to infinity	Fixed 69 ft (21 m) to infinity	Fixed 69 ft (21 m) to infinity	Fixed 69 ft (21 m) to infinity
Continuous E-Zoom	4x	4x	4x	4x	4x
Image Processing	FLIR Proprietary Digital Detail Enhancement		FLIR Proprietary Digital Detail Enhancement		
MAIN VISIBLE CAMERA					
Detector Type	N/A	1/2" Interline Transfer Lowlight CCD	N/A	1/2" Interline Transfer Lowlight CCD	1/2" Interline Transfer Lowlight CCD
Lines of Resolution	N/A	530	N/A	530	530
Minimum Illumination	N/A	1.4 Lux	N/A	1.4 Lux	1.4 Lux
Optical Zoom	N/A	36x	N/A	36x	36x
E-Zoom	N/A	12x	N/A	12x	12x
SYSTEM SPECIFICATIONS					
Video Tracking	No	No	No	No	No
Firefighter Mode	No	No	No	No	No
Pan/Tilt Adjustment Range	360° Continuous Pan, +/-90° Tilt	360° Continuous Pan, +/-90° Tilt	360° Continuous Pan, +/-90° Tilt	360° Continuous Pan, +/-90° Tilt	360° Continuous Pan, +/-90° Tilt
Analog Video Output	NTSC, 30Hz or <9Hz	NTSC, 30Hz or <9Hz	NTSC, 30 Hz or <9 Hz	NTSC, 30 Hz or <9 Hz	NTSC, 30 Hz or <9 Hz
Analog Video Connector Types	F-type BNC with BNC-to-RCA adapter included for video out		F-type BNC with BNC-to-RCA adapter included for video out		
Network Video Output	No	No	No	No	No
HD-SDI Lossless Video Output	No	No	No	No	No
Power Requirements	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC
Power Consumption	25 W nominal; 50 W max	25 W nominal; 50 W max	25 W nominal; 50 W max	25 W nominal; 50 W max	25 W nominal; 50 W max
ENVIRONMENTAL					
Operating Temperature Range	-13°F to +131°F (-25°C to +55°C)	-13°F to +131°F (-25°C to +55°C)	-13°F to +131°F (-25°C to +55°C)	-13°F to +131°F (-25°C to +55°C)	-13°F to +131°F (-25°C to +55°C)
Storage Temperature Range	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)
Automatic Window Defrost	Standard at Power-Up	Standard at Power-Up	Standard at Power-Up	Standard at Power-Up	Standard at Power-Up
Sand/Dust Ingress	Mil-Std-810E	Mil-Std-810E	Mil-Std-810E	Mil-Std-810E	Mil-Std-810E
Water Ingress	IPX 6 (heavy seas, powerful jets of water)		IPX 6 (heavy seas, powerful jets of water)		
Shock	15 g vertical, 9 g horizontal	15 g vertical, 9 g horizontal	15 g vertical, 9 g horizontal	15 g vertical, 9 g horizontal	15 g vertical, 9 g horizontal
Vibration	IEC 60945; MIL-STD-810E	IEC 60945; MIL-STD-810E	IEC 60945; MIL-STD-810E	IEC 60945; MIL-STD-810E	IEC 60945; MIL-STD-810E
Lightning Protection	Standard	Standard	Standard	Standard	Standard
Salt Mist	IEC60945	IEC60945	IEC60945	IEC60945	IEC60945
Wind	100 knot (115.2 mph)	100 knot (115.2 mph)	100 knot (115.2 mph)	100 knot (115.2 mph)	100 knot (115.2 mph)
EMI	IEC 60945	IEC 60945	IEC 60945	IEC 60945	IEC 60945
PHYSICAL					
Weight	~ 9 lbs (4 kg)	~ 9 lbs (4 kg)	~ 9 lbs (4 kg)	~ 9 lbs (4 kg)	~ 9 lbs (4 kg)
Size	7" (177.8 mm) dia. x 11.2" (284.4 mm) ht.	7" (177.8 mm) dia. x 11.2" (284.4 mm) ht.	7" (177.8 mm) dia. x 11.2" (284.4 mm) ht.	7" (177.8 mm) dia. x 11.2" (284.4 mm) ht.	7" (177.8 mm) dia. x 11.2" (284.4 mm) ht.
RANGE PERFORMANCE					
Person in the Water	1,500 ft (457 m)	1,500 ft (457 m)	2,700 ft (823 m)	2,700 ft (823 m)	4,900 ft (1,494 m)
Small Vessel	4,200 ft (1,280 m)	4,200 ft (1,280 m)	1.2 nm (2.2 km)	1.2 nm (2.2 km)	2.1 nm (3.9 km)

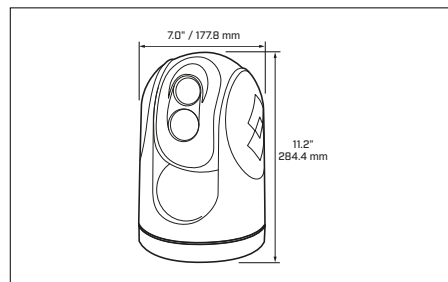

Specifications subject to change without prior notice. Images for reference purposes only.

M400 SPECIFICATIONS


	M400	M400XR
MAIN THERMAL CAMERA		
Detector Type	640 x 480 VOx Microbolometer	640 x 480 VOx Microbolometer
Video Refresh Rate	<9 Hz or 30 Hz (NTSC and PAL)	<9 Hz or 30 Hz (NTSC and PAL)
Field of View	18° to 6° HFOV / 1.5° HFOV with E-Zoom	18° to 6° HFOV / 1.5° HFOV with E-Zoom
Focal Length	35 mm (Wide) to 105 mm (Narrow)	35 mm (Wide) to 105 mm (Narrow)
Optical Zoom	1x to 4x	1x to 4x
E-Zoom	1x to 4x	1x to 4x
Image Processing	FLIR Proprietary Digital Detail Enhancement	FLIR Proprietary Digital Detail Enhancement
MAIN VISIBLE CAMERA		
Detector Type	Long-range color daylight and low-light viewing	Long-range color daylight and low-light viewing
Lines of Resolution	High Definition up to 1080/30p	High Definition up to 1080/30p
Minimum Illumination	>0.5 lux at 50 IRE / .05 lux in ICR Mode (B/W)	>0.5 lux at 50 IRE / .05 Lux in ICR Mode (B/W)
Zoom	30x Optical Zoom	30x Optical Zoom
Focal Length	129 mm to 4.3 mm	129 mm to 4.3 mm
Field of View	64° to 2.3° Optical HFOV / 0.2 NFOV E-Zoom	64° to 2.3° Optical HFOV / 0.2 NFOV E-Zoom
SPOTLIGHT SPECIFICATIONS		
Type, Lumens, Beam°	LED, 580 Lumens, 5° Divergence Angle	LED, 580 Lumens, 5° Divergence Angle
SYSTEM SPECIFICATIONS		
Video Tracking	No	Yes
Radar Target Tracking	Yes	Yes
Firefighter Mode	No	Yes
Pan/Tilt Adjustment Range	360° Continuous Pan, +/-90° Tilt	360° Continuous Pan, +/-90° Tilt
Analog Video Output	NTSC or PAL, 30 Hz or <9 Hz	NTSC or PAL, 30 Hz or <9 Hz
Analog Video Connector Types	F-type BNC with BNC-to-RCA adapter included for video out	F-type BNC with BNC-to-RCA adapter included for video out
Network Video Output	Dual, Independent H.264 Network Video Streams	Dual, Independent H.264 Network Video Streams
HD-SDI Lossless Video Output	Yes	Yes
Power Requirements	24V DC	24V DC
Power Consumption	<50 W nominal; 130 W peak, 270 W 2/heaters	<50 W nominal; 130 W peak, 270 W 2/heaters
ENVIRONMENTAL		
Operating Temperature Range	-13°F to +131°F (-25°C to +55°C)	-13°F to +131°F (-25°C to +55°C)
Storage Temperature Range	-56° F to + 176°F (-50°C to +80°C)	-56° F to + 176°F (-50°C to +80°C)
Automatic Window Defrost	Standard at Power-Up	Standard at Power-Up
Sand/Dust Ingress	Mil-Std-810E	Mil-Std-810E
Water Ingress	IPX 6 (heavy seas, powerful jets of water)	IPX 6 (heavy seas, powerful jets of water)
Shock	15 g vertical, 9 g horizontal	15 g vertical, 9 g horizontal
Vibration	IEC 60945; MIL-STD-810E	IEC 60945; MIL-STD-810E
Lightning Protection	Standard	Standard
Salt Mist	IEC60945	IEC60945
Wind	100 knot (115.2 mph)	100 knot (115.2 mph)
EMI	IEC 60945	IEC 60945
PHYSICAL		
Weight	28 lbs (12.7 kg)	28 lbs (12.7 kg)
Size	10.75" (273.1 mm) x 15.65" (397.6 mm) – 18.05" (458.7mm) high with top down riser	
RANGE PERFORMANCE		
Person in the Water	1.3 nm (2.45 km)	1.3 nm (2.45 km)
Small Vessel	3.2 nm (6.0 km)	3.2 nm (6.0 km)

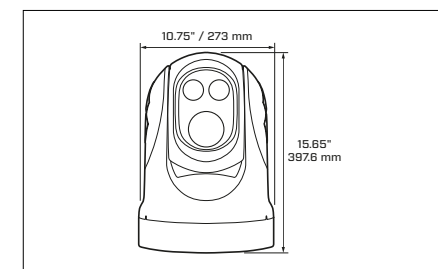

Specifications subject to change without prior notice. Images for reference purposes only.

M500 SPECIFICATIONS

	M500
THERMAL CAMERA	
Detector Type	Cooled MWIR InSb 640x512 Focal Plane Array
Video Refresh Rate	25 Hz (PAL) / 30 Hz (NTSC)
Field of View Limits	Optical 28° x 21° WFOV to 2° x 1.5° NFOV
Optical Zoom	1x to 14x (continuous)
E-Zoom	4x
NETD	<30 mK
Spectral Response	3-5 µm
COLOR CAMERA	
Visible Sensor	1/2.8" CMOS
Resolution	1920 x 1080
Field of View Limits	Optical 63.7° x 35.8° WFOV to 2.3° x 1.29° NFOV
E-Zoom	12x
SYSTEM SPECIFICATIONS	
Pan/Tilt Range	
Video Interface	Analog video, HD-SDI
Video over Ethernet	2 channels of streaming MPEG-4, H.264, or M-JPEG
NMEA0183	TCP/IP, RS-422, NMEA 0183, Pelco D
Communications	TCP/IP, RS-422, Pelco D
Video Formats	NTSC or PAL NTSC or PAL, 720p30, 1080p30
Power Requirements	12 VDC to 24 VDC (-10%+30% per IEC 60945)
Power Consumption	250 W (max w/heaters)
Output Modes	Black hot, white hot, false color palettes
Contrast Enhancement	AGC or manual, histogram equalization, local contrast enhancement algorithms available
Sharpness Enhancement	Automatic, adjustable Digital Detail Enhancement
Overlays	Integrated graphics overlays to indicate azimuth, AGC, active camera and menu control
ENVIRONMENTAL	
Operating temp	-25°C to +55°C
Storage temp	-50°C to +80°C
PHYSICAL	
Weight	45 lb (20.4 kg)
Size	10.75" (273 mm) dia. x 15.65" (397.5 mm) ht
RANGE PERFORMANCE	
Person in the Water	~4.9 nm (9.0 km)
Small Vessel	~8.3 nm (15.4 km)

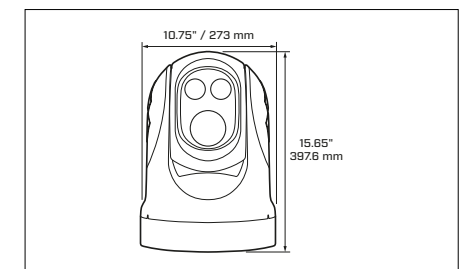

US EXPORT REGULATIONS

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved

WARRANTY

FLIR's service commitment of outstanding warranty and technical support now offers you even more; by registering your system with FLIR at www.flir.com/productreg, the 2-Year Standard Limited Warranty is upgraded and replaced by the 3-Year Extended Limited Warranty for FREE.

For complete details on FLIR's industry-leading warranty please visit www.flir.com/maritime.

FLIR MARITIME US INC.
9 TOWNSEND WEST
NASHUA, NH 03063
USA
(603) 324-7900

FLIR SYSTEMS INC.
27700 SW PARKWAY AVE
WILSONVILLE, OR 97070
USA
(503)-498-3547

FLIR BELGIUM BVBA
LUXEMBURGSTRAAT 2, 2321
MEER
BELGIUM
+32 (0)3 287 87 10

EQUIPMENT DESCRIBED HEREIN MAY REQUIRE US GOVERNMENT AUTHORIZATION FOR EXPORT PURPOSES.
DIVERSION CONTRARY TO US LAW IS PROHIBITED.
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©2017 FLIR SYSTEMS, INC. ALL RIGHTS RESERVED. IMAGERY USED FOR ILLUSTRATION PURPOSES ONLY.



The World's **Sixth Sense**®

