



The World's Sixth Sense®

THERMAL VISION FOR PROFESSIONAL MARINERS





THERMAL IMAGING BASICS

Thermal imaging works night and day, in total darkness or bright sunlight, through smoke, dust, and even light fog to keep your passengers and crew safe from hazards and threats.


See natural and man-made hazards, such as floating debris, rocks, ice, land, bridge abutments, and other vessels.

Thermal night vision helps you find a person in the water faster than any other night vision technology.

FLIR cameras and thermal video are incredibly intuitive and easy to understand. Quite simply, what you see is what you get.

Daylight cameras, image intensified night vision (I²), and the human eye all create images from reflected visible light. Traditional night vision scopes and goggles all take in small amounts of visible light and magnify it. However, traditional imagers have the same limitations as the human eye: if there isn't enough light available, they don't work well. Plus, during daylight and twilight hours, they aren't useful either because there is too much light for them to work effectively.

FLIR thermal cameras work both day and night, regardless of light. They're totally immune to the effects of darkness, glare, or even direct sunlight.

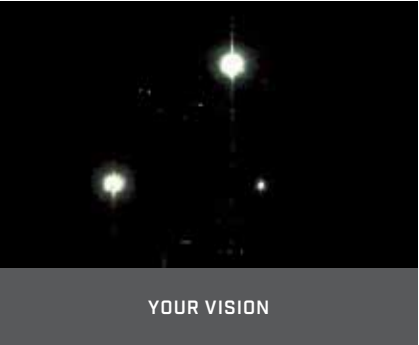

YOUR VISION



TRADITIONAL GEN3 IMAGE INTENSIFIED NIGHT VISION



FLIR THERMAL IMAGE

RESOLUTION, DETAIL, AND RANGE

FLIR offers a range of thermal imaging cameras with varying levels of image resolution. Much like a digital camera, FLIR cameras with higher pixel counts offer more detail, clarity, and range than models with less resolution. FLIR also offers models with advanced optics for extreme long-range performance.



LOWER RESOLUTION IMAGERS PROVIDE GOOD, BASIC TARGET DETECTION



HIGHER RESOLUTION THERMAL IMAGERS OFFER INCREASED LEVELS OF DETAIL AND LONG-RANGE PERFORMANCE

FLIR FOR COMMERCIAL MARINERS

THE SEA CAN BE A DANGEROUS PLACE, ESPECIALLY AT NIGHT

But professional mariners can't call it a day when the weather turns foul. FLIR thermal imagers offer an "early warning system" against common hazards so mariners can sail with confidence, whatever the conditions. FLIR maritime thermal imagers display the invisible heat energy from a myriad of potential hazards, including floating debris, shipping lane traffic, vessels riding at anchor, and small boats. FLIR imagers can also reveal man-made structures, such as buoys, bridge abutments, docks and piers. They can even spot icebergs and surfacing whales.



FLIR FOR FIRST RESPONDERS

THERMAL VISION: THE 24/7 TACTICAL ADVANTAGE

First responders gain critical tactical awareness using FLIR thermal cameras, day or night, in good weather and bad. With FLIR thermal vision you can observe suspicious activity in total darkness, quickly locate people in the water, and avoid obstacles while going full throttle in response to emergencies. From border patrols to port security, search and rescue to drug interdiction, FLIR thermal imaging cameras can greatly enhance critical mission success.



MONITOR CREW ON DECK



TRACK POTENTIALLY
THREATENING VESSELS



LOCATE ICEBERGS

RECOMMENDED COMMERCIAL SYSTEMS:



MD Series



M100/200



M-Series



M400



M500



SEE SUSPECTS IN THE DARK



GAIN SITUATIONAL AWARENESS WHEN
APPROACHING VESSELS



OBSERVE LATE NIGHT ACTIVITY ON SHORE

RECOMMENDED FIRST RESPONDER SYSTEMS:



Ocean Scout



LS-Series



BHM-Series



MD Series



M-Series



M400


LS-SERIES TACTICAL THERMAL NIGHT VISION

THEY CAN RUN BUT THEY CAN'T HIDE

FLIR's LS-X and LS-XR handheld thermal night vision monoculars are built specifically for those who serve and protect. As a proven force-multiplier, the LS-Series helps maritime first responders see clearly at night while conducting search and rescue missions, patrolling ports and harbors, assisting disabled boaters, and even responding to HAZMAT emergencies. The new LS-X and the LS-XR feature enhanced resolution displays, extended zoom capabilities, a tactical marking laser, and video output.



DETECTION RANGES

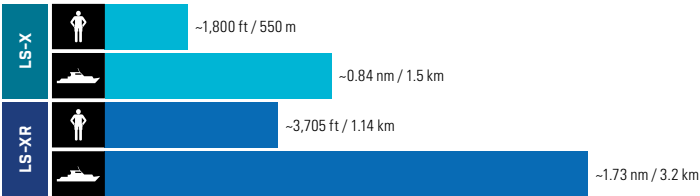

IMPROVED AWARENESS

- Enhanced high-resolution LCD display
- Video output capability
- Up to 8x magnification

SIMPLE OPERATION

- Starts up in seconds
- Multiple InstAlert™ levels call attention to hot objects
- Intuitive menu navigation
- Red marking laser for highlighting targets of interest or hidden suspects

PORTABLE AND RUGGED

- Fits in packs, pockets or included Molle bag
- Rubberized armor protection from accidental drops
- Waterproof, all-weather construction

For technical specifications, turn to page 32



MONITOR PORT ACTIVITIES



INVESTIGATE SUSPICIOUS BEHAVIOR




FIND OIL SLICKS AND OTHER TOXIC SPILLS

www.flir.com

Specifications subject to change without prior notice. Images for reference purposes only

RANGE COMPARISON CHART

The following chart compares the man-overboard and small vessel detection distances for the FLIR range of thermal cameras.

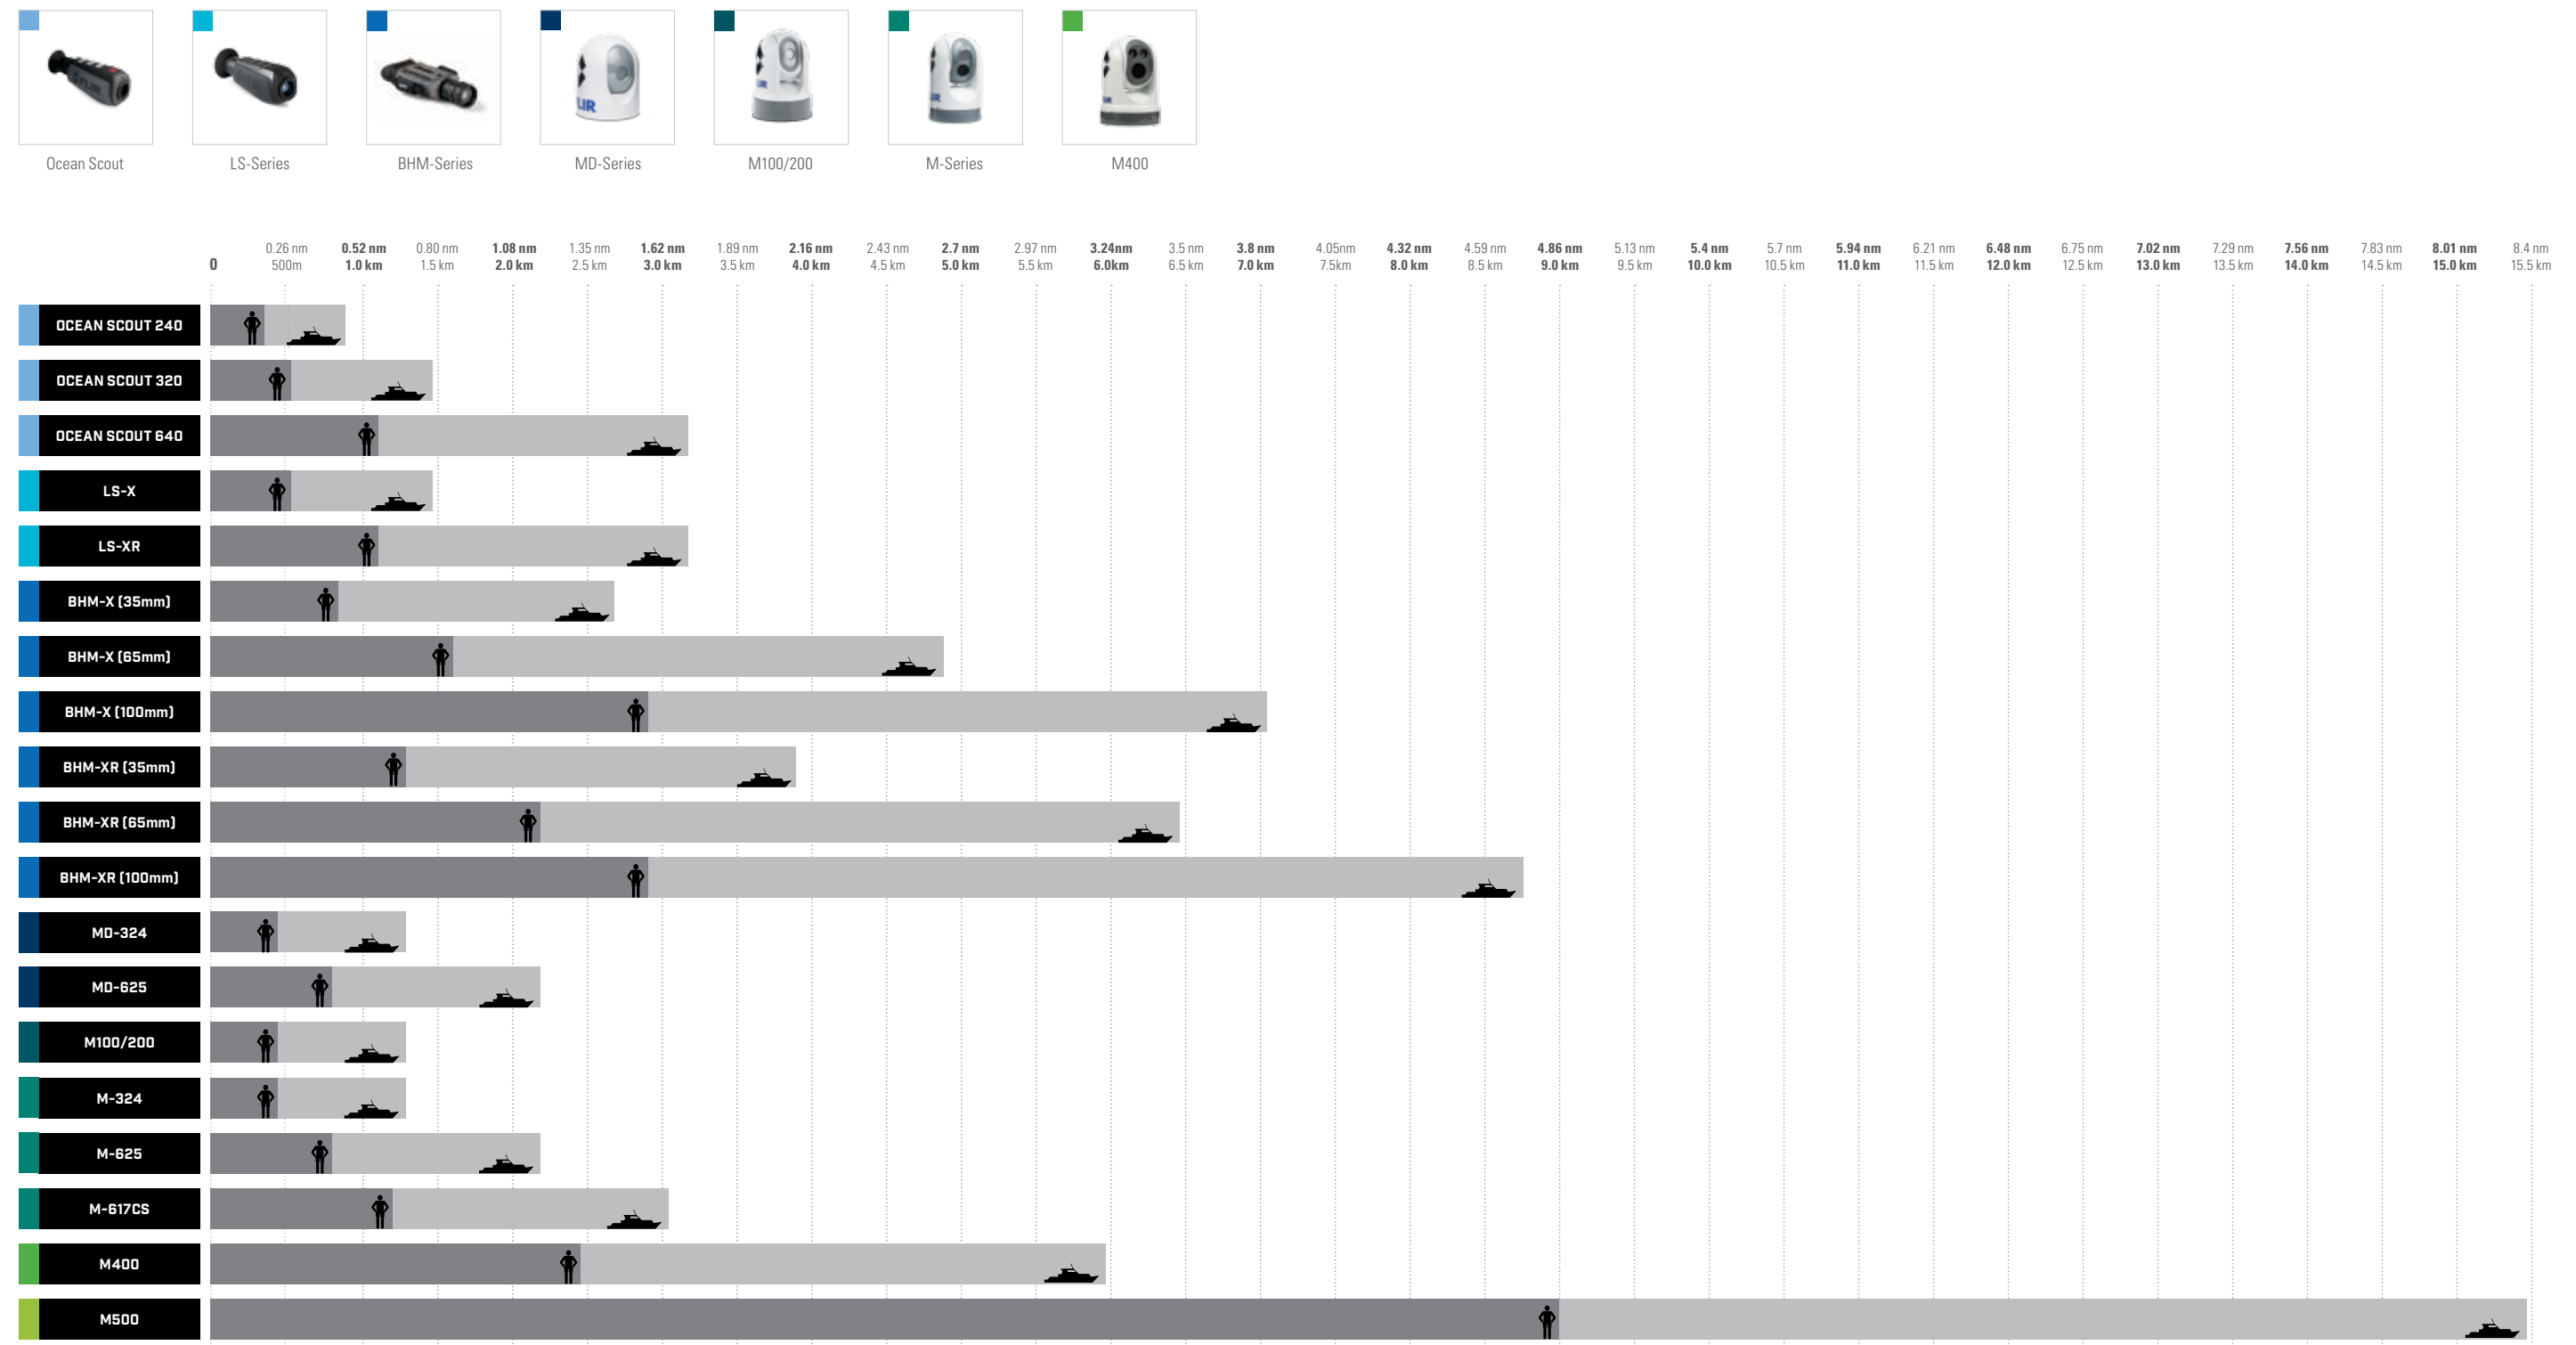

Specifications subject to change without prior notice. Images for reference purposes only.

Specifications subject to change without prior notice. Images for reference purposes only.

IMAGE RESOLUTION AND SAMPLE IMAGES

OCEAN SCOUT – HANDHELD

The FLIR Ocean Scout puts advanced thermal imaging in the palm of your hand. With thermal vision, you can peer into darkness and see objects and your surroundings as clear as day, keeping you safer, and making your time on the water more relaxing. Resolutions range from 280 x 180 to 640 x 512 pixels, depending upon the model.



OS-240	OS-320	OS-640
240 x 180 pxl	336 x 256 pxl	640 x 512 pxl



MAN IN CANOE – BLACK HOT MODE



MAN IN CANOE – WHITE HOT MODE



MAN OVERBOARD – WHITE HOT MODE



MAN OVERBOARD – INSTALERT™

LS SERIES – HANDHELD

This powerful, yet simple imager gives Law Enforcement an unfair advantage whether searching for evidence or pursuing a suspect, all in the palm of your hand. The newest additions to this field-proven line, LS-X and the LS-XR, feature enhanced resolution displays, extended zoom capabilities, and video output.



LS-X SERIES	LS-XR SERIES
336 x 256 pxl	640 x 512 pxl



MAN OVERBOARD – BLACK HOT MODE



SAILBOAT & COASTLINE – WHITE HOT MODE


Images for illustrative purposes only

BHM-SERIES – HANDHELD

With powerful interchangeable lenses, BHM-Series cameras are the most powerful handheld, battery-powered, thermal night vision cameras available, making them the right choice for use on vessels of any size, and giving you the edge in all of your nighttime travels. There are two models to choose from: BHM-X (320 x 240 pixels) and the BHM-XR (640 x 480 pixels).



BHM-X SERIES	BHM-XR SERIES
320 x 240 pxl	640 x 512 pxl

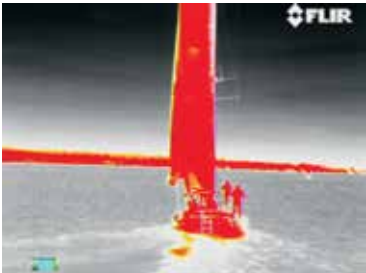

SAILBOAT AND CREW – INSTALERT™



SMALL POWERBOAT – BLACK HOT MODE

MD-SERIES – COMPACT THERMAL NIGHT VISION CAMERAS


These fixed-mount thermal night vision cameras help with steering around obstacles, collision avoidance and finding people in the water at night. There are two models to choose from: MD-324 (320 x 240 pixels) and the MD-625 (640 x 480 pixels).



MD-324	MD-625
320 x 240 pxl	640 x 480 pxl



JETTY & BUOY – WHITE HOT MODE

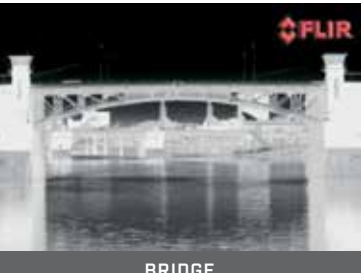


BRIDGE

Images for illustrative purposes only


OCEAN SCOUT SPECIFICATIONS

	OCEAN SCOUT 240	OCEAN SCOUT 320	OCEAN SCOUT 640
			
GENERAL			
Detector Resolution	240 x 180	336 x 256	640 x 512
Refresh Rate	9 Hz		
Field of View	24° x 18°	17° x 13°	18° x 14°
Zoom	NA	2x E-Zoom	2x, 4x, and E-Zoom
Color Palettes	White Hot / Black Hot / InstAlert™		
Battery	Internal Lithium Ion rechargeable (5-hour typical life)		
Waterproofing	IP-67 Submersible to 1 Meter		
Weight	0.75lb (0.34 kg)		
RANGE PERFORMANCE			
Man	1,150 ft (350 m)	1,800 ft (550 m)	3,705ft (1.14 km)
Vehicle/vessel	0.48 nm (0.90 km)	0.84 nm (1.5 km)	1.73 nm (3.2 km)

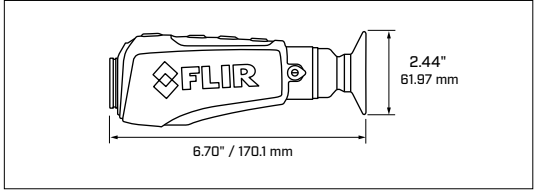


LS-SERIES SPECIFICATIONS

	LS-X	LS-XR
		
GENERAL		
Detector Resolution	336 x 256	640 x 512
Refresh Rate	9 Hz or 30 Hz	
Field of View	17° x 13°	18° x 14°
Zoom	2x and 4x E-Zoom	2x,4x, and 8x E-Zoom
Color Palettes	White Hot / Black Hot / InstAlert™	
Battery	Internal Lithium Ion rechargeable, (5-hour typical life)	
Laser Pointer	Red Laser Pointer	
Video Output	NTSC or PAL composite via supplied cable	
Waterproofing	IP-67 Submersible to 1 meter	
Weight	0.75lb (0.34 kg)	
RANGE PERFORMANCE		
Person in the Water (6 x 1.6 ft / 1.8 x 0.5 m)	1,870 ft (570 m)	0.62 nm (1.14 km)
Small Vessel (13 x 5.0 ft / 4.0 x 1.5 m)	0.84 nm (1.55 km)	1.62 nm (3 km)

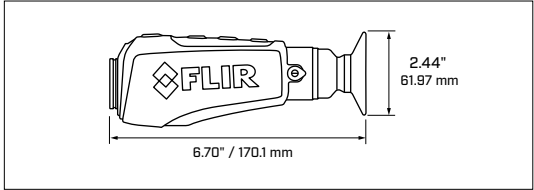


BHM-SERIES SPECIFICATIONS

	BHM-X+	BHM-XR+
		
GENERAL		
Detector Resolution	320 x 240	640 x 480
Refresh Rate	9 Hz or 30 Hz	
Field of View:		
35 mm lens	13° x 10°	18° x 13°
65 mm lens	7° x 5°	10° x 8°
100 mm lens	5° x 3°	6° x 4°
Zoom	2x E-Zoom	2x and 4x E-Zoom
Color Palettes	White Hot / Black Hot / InstAlert™; Selectable	
Battery	4 AA Batteries, NiMH Li-Ion or Alkaline	
Video Output	NTSC or PAL composite via supplied cable	
Waterproofing	IP-67 Submersible to 1 Meter	
Weight:		
with 35 mm lens	0.84 lbs (0.38 kg)	
with 65 mm lens	3.05 lbs (1.38 kg)	
with 100 mm lens	3.06 lbs (1.39 kg)	
RANGE PERFORMANCE		
Person in the Water (6 x 1.6 ft / 1.8 x 0.5 m):		
35 mm lens	2,887 ft (880 m)	0.70 nm (1.3 km)
65 mm lens	0.89 nm (1.65 km)	1.18 nm (2.2 km)
100 mm lens	1.30 nm (2.4 km)	1.59 nm (2.95 km)
Small Vessel (13 x 5.0 ft / 4.0 x 1.5 m):		
35 mm lens	1.46 nm (2.7 km)	2.1 nm (3.9 km)
65 mm lens	2.65 nm (4.9 km)	3.5 nm (6.5 km)
100 mm lens	3.83 nm (7.1 km)	4.75 nm (8.8 km)

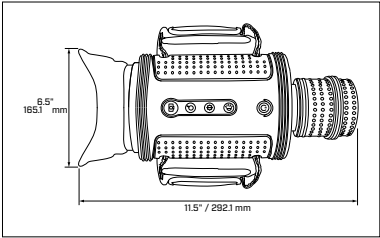


MD-SERIES SPECIFICATIONS

	MD-324	MD-625
		
MAIN THERMAL CAMERA		
Detector Type	320 x 240 VOx Microbolometer	640 x 480 VOx Microbolometer
Video Refresh Rate	<9 Hz or 30 Hz (NTSC and PAL)	<9 Hz or 30 Hz (NTSC and PAL)
Field of View	24° x 18° (NTSC)	25° x 20° (NTSC)
Focal Length	19 mm	25 mm
Focus	Fixed 12ft (3.6m) to infinity	Fixed 12ft (3.6m) to infinity
Optical Zoom	N/A	N/A
E-Zoom	2x	2x, 4x
Image Processing	FLIR Proprietary Digital Detail Enhancement	FLIR Proprietary Digital Detail Enhancement
SYSTEM SPECIFICATIONS		
Video Tracking	No	No
Firefighter Mode	No	No
Pan/Tilt Adjustment Range	Pan: ±30° per key, Tilt: +34°, -27° (Locked in at Installation)	Pan: ±30° per key, Tilt: +34°, -27° (Locked in at Installation)
Analog Video Output	NTSC or PAL, 30 Hz or <9 Hz	NTSC or PAL, 30 Hz or <9 Hz
Analog Video Connector Types	F-type BNC with BNC-to-RCA adapter included for video out	F-type BNC with BNC-to-RCA adapter included for video out
Network Video Output	No	No
HD-SDI Lossless Video Output	No	No
Power Requirements	12-24 V DC via included PoE injector	12-24 V DC via included PoE injector
Power Consumption	4.8 W nominal; 12.5 W max	4.8 W nominal; 12.5 W max
ENVIRONMENTAL		
Operating Temperature Range	-13°F to +131°F (-25°C to +55°C)	-13°F to +131°F (-25°C to +55°C)
Storage Temperature Range	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)
Automatic Window Defrost	Standard at Power-Up	Standard at Power-Up
Sand/Dust Ingress	Mil-Std-810E	Mil-Std-810E
Water Ingress	IPX 6 (heavy seas, powerful jets of water)	IPX 6 (heavy seas, powerful jets of water)
Shock	15 g vertical, 9 g horizontal	15 g vertical, 9 g horizontal
Vibration	IEC 60945; MIL-STD-810E	IEC 60945; MIL-STD-810E
Lightning Protection	Standard	Standard
Salt Mist	IEC60945	IEC60945
Wind	100 knot (115.2 mph)	100 knot (115.2 mph)
EMI	IEC 60945	IEC 60945
PHYSICAL		
Weight	~ 3 lbs (1.36 kg)	~ 3 lbs (1.36 kg)
Size	6" (152.4 mm) dia. x 7" (177.8 mm) ht.	6" (152.4 mm) dia. x 7" (177.8 mm) ht.
RANGE PERFORMANCE		
Person in the Water	1,500 ft (457 m)	2,700 ft (823 m)
Small Vessel	4,200 ft (1280 m)	1.2 nm (2.2 km)

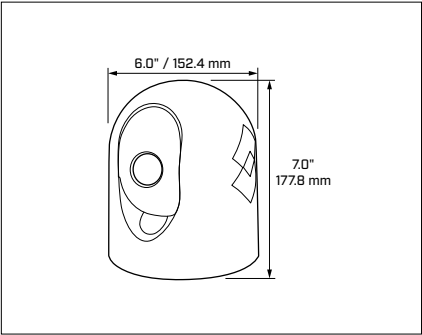

M100/200 SPECIFICATIONS

	M100/M200
	
GENERAL	
Detector Type	320 x 240 VOx Microbolometer
Video Refresh Rate	9 Hz
Field of View	24° x 18°
Focal Length	19 mm
E-Zoom	4x
Image Processing	FLIR Proprietary Digital Detail Enhancement
SYSTEM SPECIFICATIONS	
Pan/Tilt Range	M100 – Tilt: +110°, -90° M200 – Pan: 360° (continuous), Tilt: +110°, -90°
Video Output	H264 IP Video stream
Power Requirements	12 or 24 VDC
Power Consumption	15 W (typical) 18 W (max)
ENVIRONMENTAL	
Operating Temperature Range	-13°F to +131°F (-25°C to +55°C)
Storage Temperature Range	-30°F to +158°F (-30°C to +70°C)
Relative Humidity	95% max
Automatic Window Defrost	Standard at Power-Up
Water Ingress	IPX 6 (heavy seas, powerful jets of water)
Shock	15 g vertical, 9 g horizontal
Vibration	IEC 60945; MIL-STD-810E
Salt Mist	IEC 60945
Wind	100 mph (161 kph)
EMI	IEC 60945
PHYSICAL	
Weight	6.0 lb (2.7 kg) w/o top-down riser 6.6 lb (3.0 kg) w/ top-down riser
Size	6.34" (dia. @ base) x 9.03" (ht.) 161.1 (dia.) x 229.3 (ht.) mm
RANGE PERFORMANCE	
Person in the Water	~1,500 ft (457 m)
Small Vessel	~0.67 nm (1.3 km)



US EXPORT REGULATIONS

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved

WARRANTY

FLIR's service commitment of outstanding warranty and technical support now offers you even more; by registering your system with FLIR at www.flir.com/productreg, the 2-Year Standard Limited Warranty is upgraded and replaced by the 3-Year Extended Limited Warranty for FREE.

For complete details on FLIR's industry-leading warranty please visit
www.flir.com/maritime.

FLIR MARITIME US INC.
9 TOWNSEND WEST
NASHUA, NH 03063
USA
(603) 324-7900

FLIR SYSTEMS INC.
27700 SW PARKWAY AVE
WILSONVILLE, OR 97070
USA
(503)-498-3547

FLIR BELGIUM BVBA
LUXEMBURGSTRAAT 2, 2321
MEER
BELGIUM
+32 (0)3 287 87 10

EQUIPMENT DESCRIBED HEREIN MAY REQUIRE US GOVERNMENT AUTHORIZATION FOR EXPORT PURPOSES.
DIVERSION CONTRARY TO US LAW IS PROHIBITED.
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
©2017 FLIR SYSTEMS, INC. ALL RIGHTS RESERVED. IMAGERY USED FOR ILLUSTRATION PURPOSES ONLY.



The World's **Sixth Sense**®

